


REV. X

TITLE
 SOCKET STRIP
 .025 SQ. TAIL

DWG NO.
 SSQ-117-03-G-D

CURRENT AS OF 01-28-98
 PLEASE CONTACT SAMTEC
 FOR PRESENT REVISION

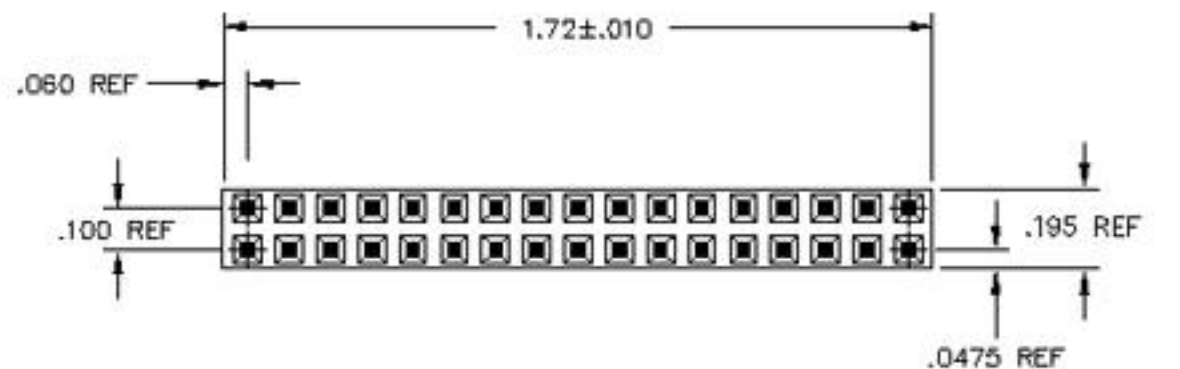


SSQ-117-03-G-D

NO. OF POSITIONS PER ROW
 -17

CONTACT SPECIFICATION
 -03

PLATING SPECIFICATION
 -G: GOLD

BODY SPECIFICATION
 -D: DOUBLE

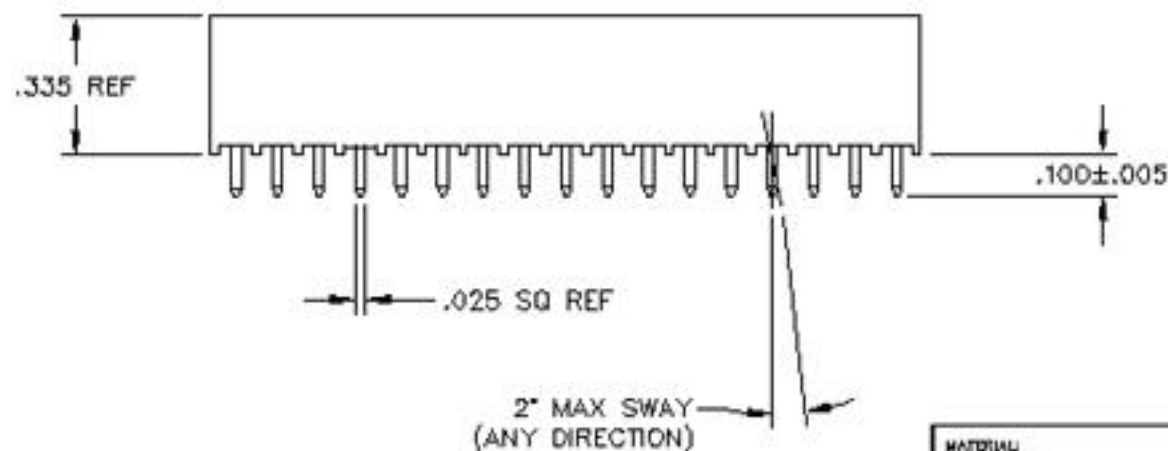

MATERIAL
 INSULATORS:
 VALOX 8030-N OR FINITE FR-530
 COLOR: BLACK

CONTACT:
 PHOSPHOR BRONZE, ALLOY NO. 510 OR 511

PLATING-
 .000250 GOLD OVER .000250 NICKEL

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES
 TOLERANCES ARE:

XXX ± .005
 XXXX ± .0025
 ANGLES ± 2°

DWG/CEO
 SSQ117D

samtec

810 PROGRESS BLVD. NEW ALBANY, IN 47150
 (812) 944-5733 F.O. BOX 1147 TVO IN 47140-0147

THIS DRAWING HAS BEEN REVIEWED FOR ACCURACY, IF ANY QUESTIONS PLEASE CALL:

PROPRIETARY NOTE
 THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC INC.

- NOTES
1. CONTACT PUSHOUT FORCE: 1.5 lbs. MIN.
 2. MAX ALLOWABLE BOW: .003 INCH/INCH.
 3. MAX ALLOWABLE SWAY: 2" IN EITHER DIRECTION.
 4. MAX ALLOWABLE VARIATION BETWEEN PIN ROWS: .010
 5. "END WALLS" AFTER CUTTING SHOULD BE .020 ± .003.